



# Vertical reach-ins: ADR - ADC

Nothing will grab the attention of your customers more than the striking design of these vertical self-service units. A sturdy build means these units can take just about anything and a solid back means two units can be placed back to back with no airflow problems. Strong pre-fitted shelving means these units can be delivered fully mounted and ready to use!

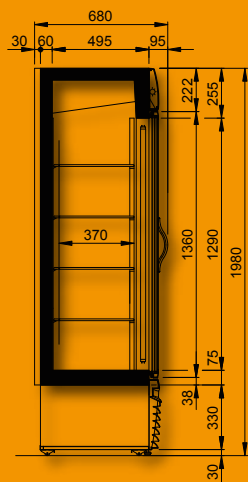

ADR-4 / ADC-4  
DIMENSIONS IN mm

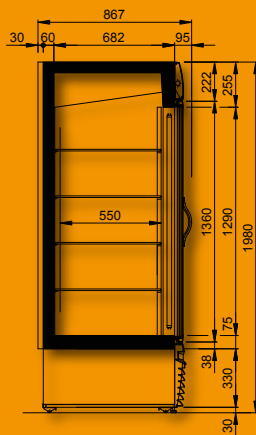

ADR-6 / ADC-6  
DIMENSIONS IN mm

## APPLICATIONS:

- Medium temperature products such as dairy, soft drinks, beer, juices and chilled soups. Low-temperature frozen food and ice cream.

## STANDARD EQUIPMENT:

- Mechanical thermostat, thermometer
- Adjustable shelving (height and angle)
- Canopy lighting
- Interior lighting
- Adjustable feet
- Back handles for transport
- Glass door

## OPTIONS AND ACCESSORIES:

- Extra shelving
- Solid door
- Adaptable to 115V/60Hz
- A wide range of colours
- Adhesive branding
- Canopy branding

## VERTICAL REACH-INS: ADR-6/ ADC-6

	ADR-4	ADR-6	ADC-4	ADC-6
<b>Merchandising data</b>				
Length (mm)	670	670	670	670
Capacity (l)	280	409	280	409
Net volume (m <sup>3</sup> )	0.85	1.11	0.85	1.11
Gross volume (m <sup>3</sup> )	0.94	1.23	0.94	1.23
Refrigerated area (m <sup>2</sup> )	1.01	1.51	1.01	1.51
Total display area (m <sup>2</sup> )	0.52	1.16	0.52	1.16
No. shelves	4	4	4	4
Shelf dimensions (w x l, mm)	535x360	535x535	535x360	535x535
<b>Electrical data</b>				
Energy consumption (kWh/24h)	6.58	5.76	14.81	15.92
Maximum amperage (A)	3.07	3	5.12	5.24
Sound level (dB)	55	55	55	55
<b>Refrigeration data</b>				
Climate class	4+	4+	4+	4+
Product temperature class	M2	M2	L1	L1
Refrigerant gas	134A	404A	134A	404A
Refrigerant quantity (g)	300	300	300	300
Refrigeration system (static/air cooled)	Air cooled	Air cooled	Air cooled	Air cooled
Automatic defrosting (yes/no)	Yes		Yes	



# Looking good for your business